

Picture: SL 608 Outdoor High Lifter RT

HIGHLIGHT

- 1. High Lifter option:**  
Extra manual or electrical extension of the arm.
- 2. Electric rotating yoke:**  
Stepless 3D movement of the arm and yoke.



## SL 608 OUTDOOR SERIES

LIFTS UP TO 608 KG / 1,340 LBS.

SL 608 Outdoor series offers you more power and more options. Choose longer reach and a rotating yoke for more flexibility during installation. One man can easily handle the rotation of large glass sections and experience maximum flexibility during installation.

The 608 series is fitted with twin tires to ensure that it does not get bogged down in off-road conditions. It is front-wheel driven and fitted with wide, puncture-proof tyres to ensure unique stability driving in terrain. The lift is available in a High Lifter version for additional reach and can be fitted with an electric rotating yoke.

Customize your lift by choosing between the factory installed options available for the 608 series. This way you get the right machine for your projects.

Models: Outdoor / High Lifter / High Lifter RT / High Lifter Electric / High Lifter Electric RT

Find a product comparison overview on page 54.

Available in all colors



EXTENSION OF ARM  
**UP TO 160 CM** /63 IN.



LIFTING HEIGHT  
**UP TO 420 CM** /165 IN.




Customize the lift to fit your exact needs by selecting from the options list below.

### BUILD YOUR SMARTLIFT

	Standard
Foam-filled tyres	
Single Gyro	■
Electric key switch	■
White, non-marking tires	■
Special Color	■
Wireless remote	■
Manual extension (High Lifter - HL)	■
Electrical extension (High Lifter Elec. - HLE)	■
Rotating yoke RT (only HL and HLE)	■

■ Select the options you need

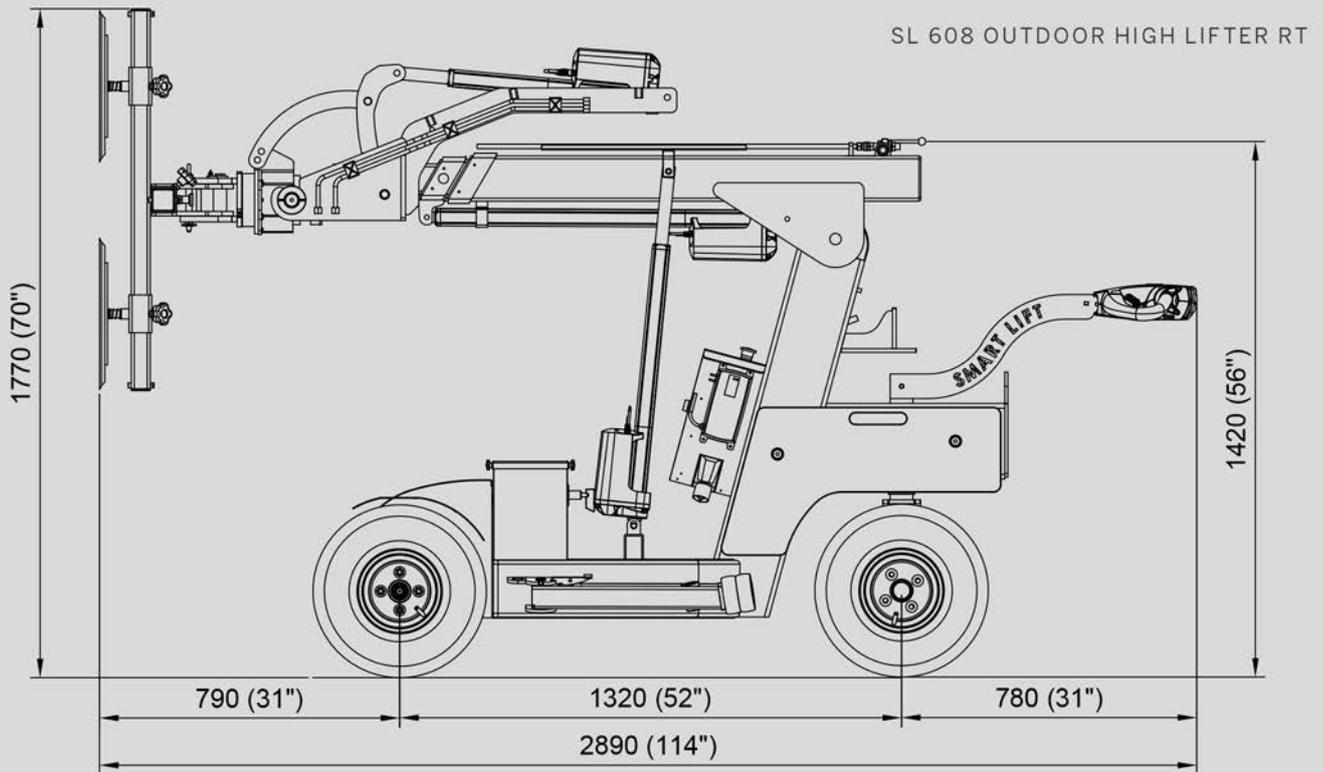

## TECHNICAL SPECIFICATIONS

Model	SL 608 Outdoor	SL 608 Outdoor HL/RT + HLE/RT
Lifting cap. arm in/out	608/280 kg - 1,340/620 lbs.	608/150kg - 1,340/330 lbs.
Lifting height	3,400 mm/134 in.	4,200 mm/165 in.
Extension of arm	700 mm/27 in.	700+900mm/12 ft. 2 in.
Tip from horizontal	40° back / 100° fwd.	40° back / 100° fwd.
Side shift	100 mm / 4 in.	100 mm / 4 in.
Charging voltage	230 V / 110V	230 V / 110V
Charging time	Approx. 8 hrs.	Approx. 8 hrs.
Running period	Up to 8 hrs.	Up to 8 hrs.
Front-wheel drive	1200 W AC	1200 W AC
Suction pads	4 x Ø400mm / 4 x Ø16 in.	4 x Ø400mm / 4 x Ø16 in.
Width	830 mm / 33 in.	840 mm / 33 in.
Curb weight	850 kg / 1,875 lbs.	930-980 kg / 2,050-2,160 lbs.
Class	IP 65	IP 65

## SL 608 OUTDOOR HIGH LIFTER RT

