

MC 45S

RADIO-REMOTE CONTROL ON DRIVING, STEERING, BOOM MOVEMENTS,
WINCH AND OTHER ACCESSORIES

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

REMOVABLE COUNTERWEIGHTS

HYDRAULICALLY TELESCOPING
SEQUENTIAL TYPE BOOM

Options :

- HYDRAULIC WINCH
- HYDRAULIC FLY JIB
- BENDABLE MANUAL JIB WITH
MANUAL EXTENSION
- NON-MARKING TIRES
- HYDRAULIC FORKS
- MAN BUCKET
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING





Load charts



Technical features

Max Capacity kg	 4,500
Dimensions mm	 2775x1200x1648

	Front-wheels drive. 2 electric motors AC 3 kW 48V Insulation class H	LMI.	Electronic safe load indicator and tilting moment limiter
	Total Kg. 4,900 Removable counterweights Kg.1,360		Automatic braking system on all wheels
	48 V - 600 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 2 superelastic 23x10-12" Rear nr. 2 superelastic 18x7-8"		+60°/-15°
	Rear Steering angle -90°/+90°		Motor driven pump 9 kW - 48 V AC, Insulation class H

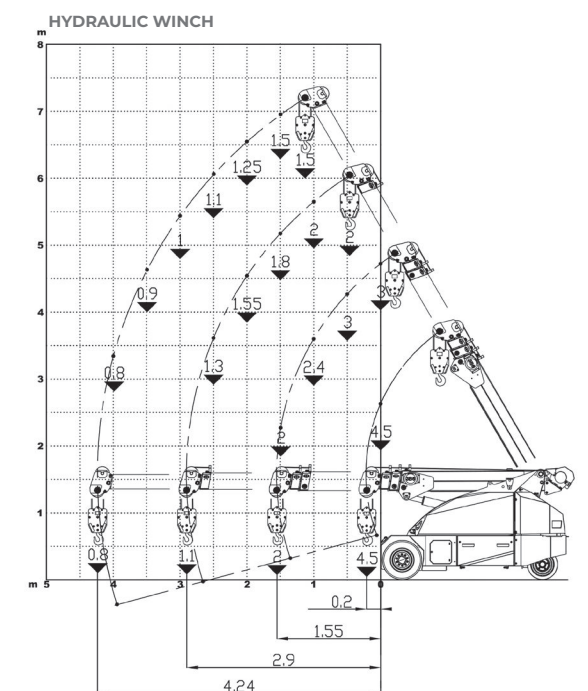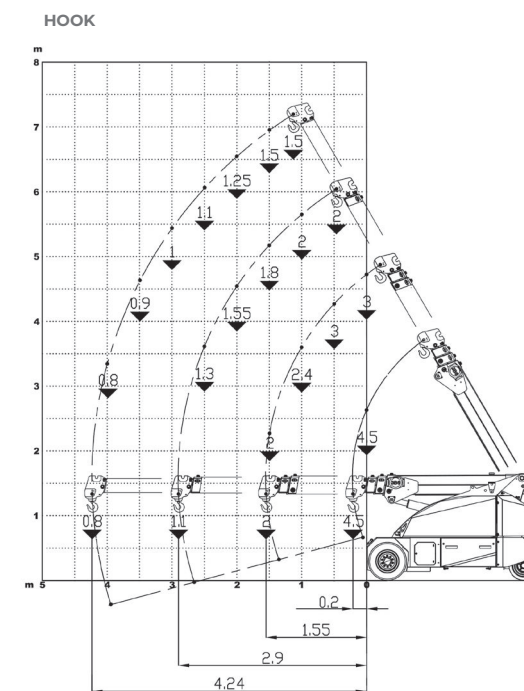

EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE- 2014/35 UE- 2000/14 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimensions




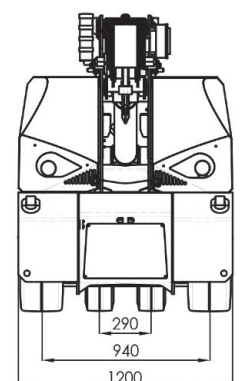


DIAGRAMMA DELLE PORTATE (t)
 CAPACITY DIAGRAM (t)
 TRAGLASTDIAGRAMM (t)
 LASTENDIAGRAMM (t)
 TABLEAU DES CHARGES (t)
 DIAGRAMA DE LAS CARGAS (t)

JMG

MILANO - ITALY

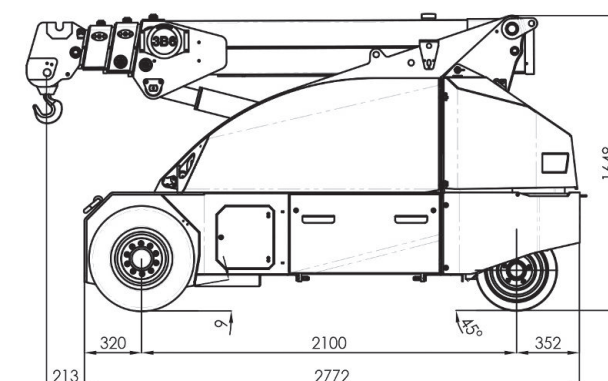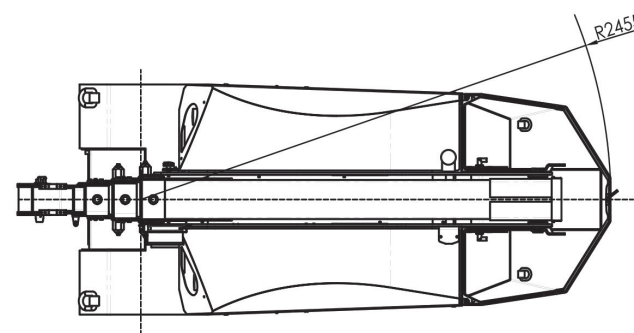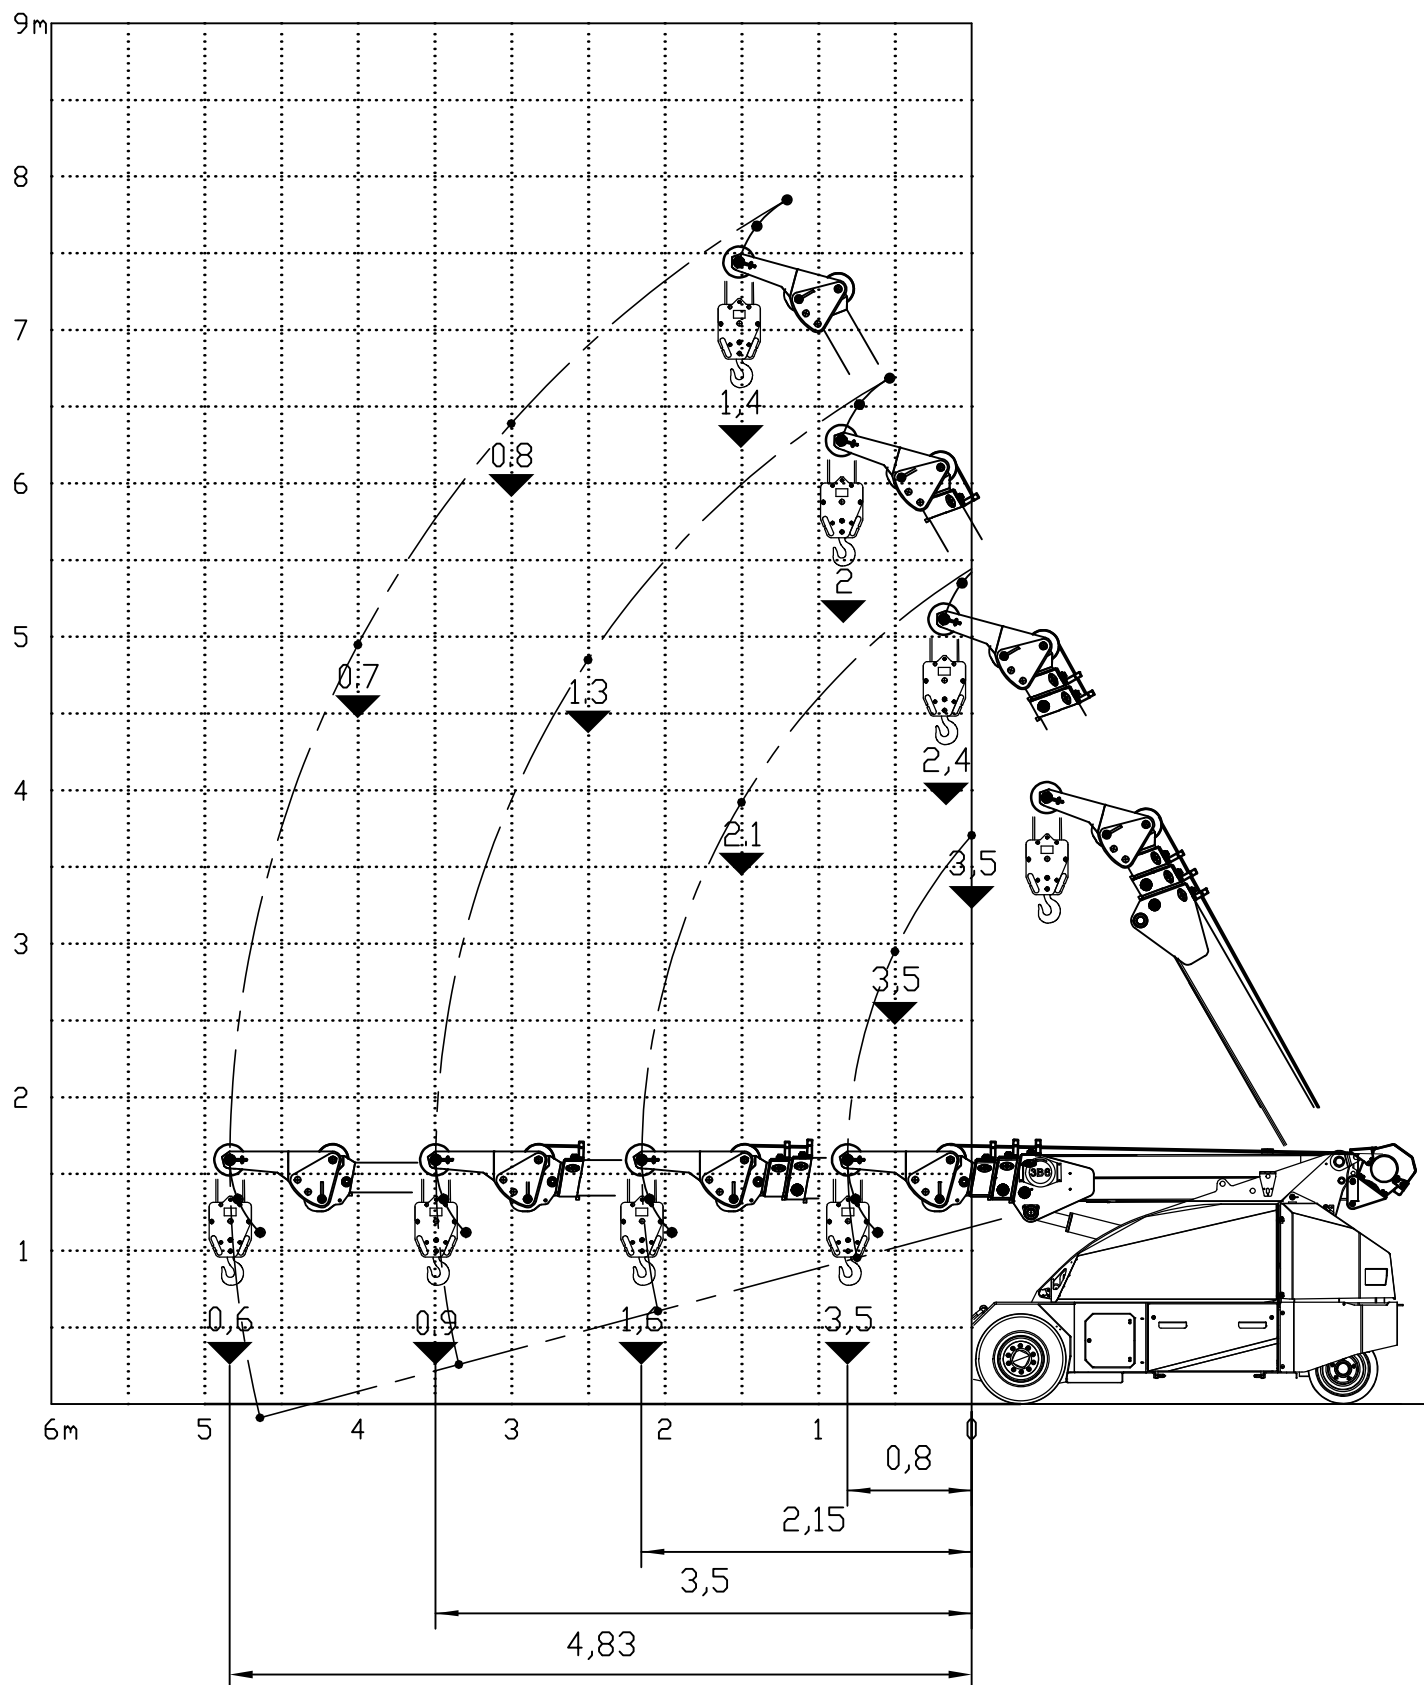

MC45S

Z1+Z2


COD.

090-DIA-01221 00 H1:50

DIAGRAMMA DELLE PORTATE (t)
 CAPACITY DIAGRAM (t)
 TRAGLASTDIAGRAMM (t)
 LASTENDIAGRAMM (t)
 TABLEAU DES CHARGES (t)
 DIAGRAMA DE LAS CARGAS (t)

JMG

MILANO - ITALY

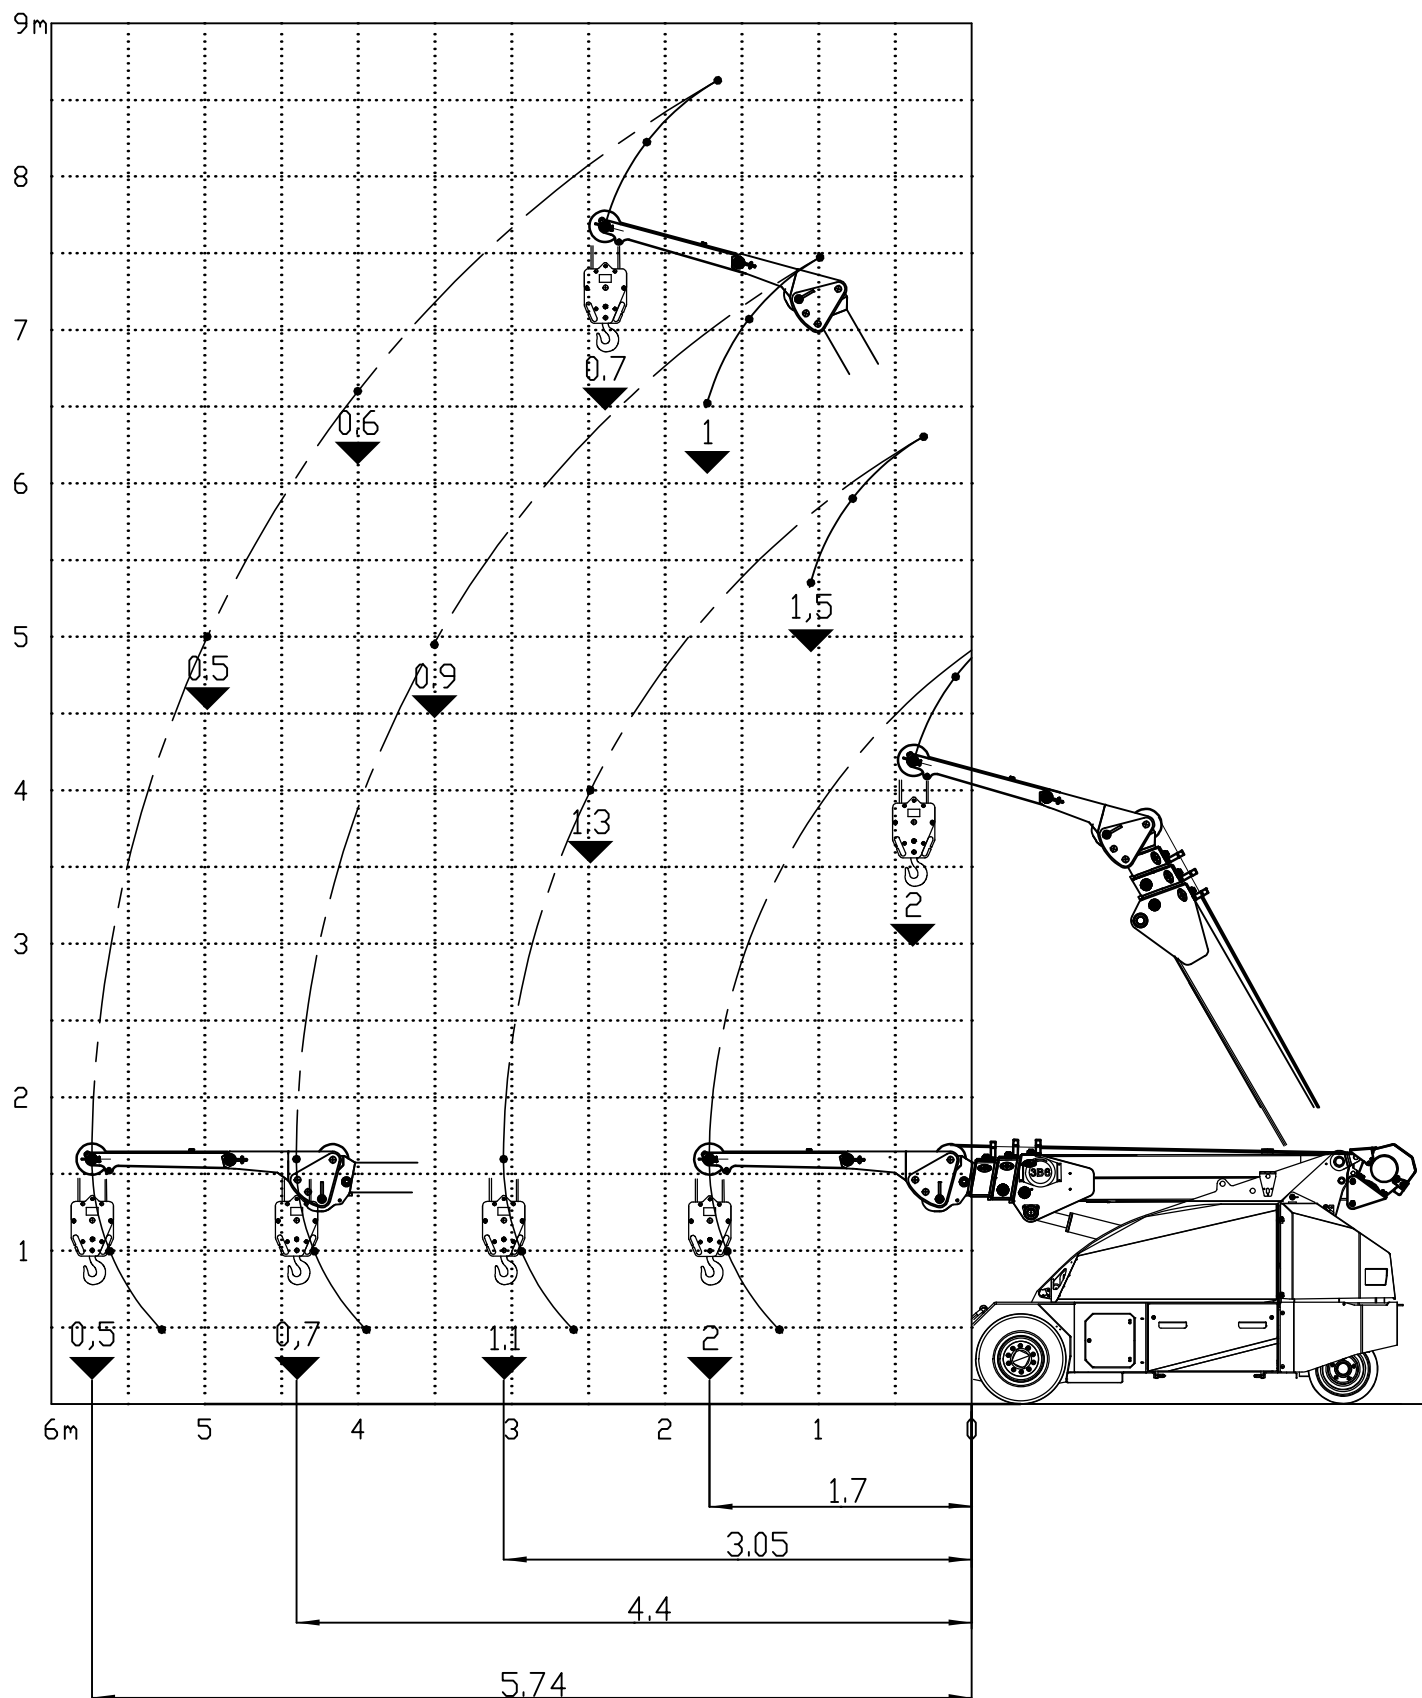

MC45S

Z1+Z2


COD.

090-DIA-01233 00 H1:50

DIAGRAMMA DELLE PORTATE (t)
 CAPACITY DIAGRAM (t)
 TRAGLASTDIAGRAMM (t)
 LASTENDIAGRAM (t)
 TABLEAU DES CHARGES (t)
 DIAGRAMA DE LAS CARGAS (t)

JMG

Peso del bozzello: 50kg
 Weight of the block: 50kg
 Gewicht des hakenblock: 50kg
 Poids du bloc de crochet: 50kg

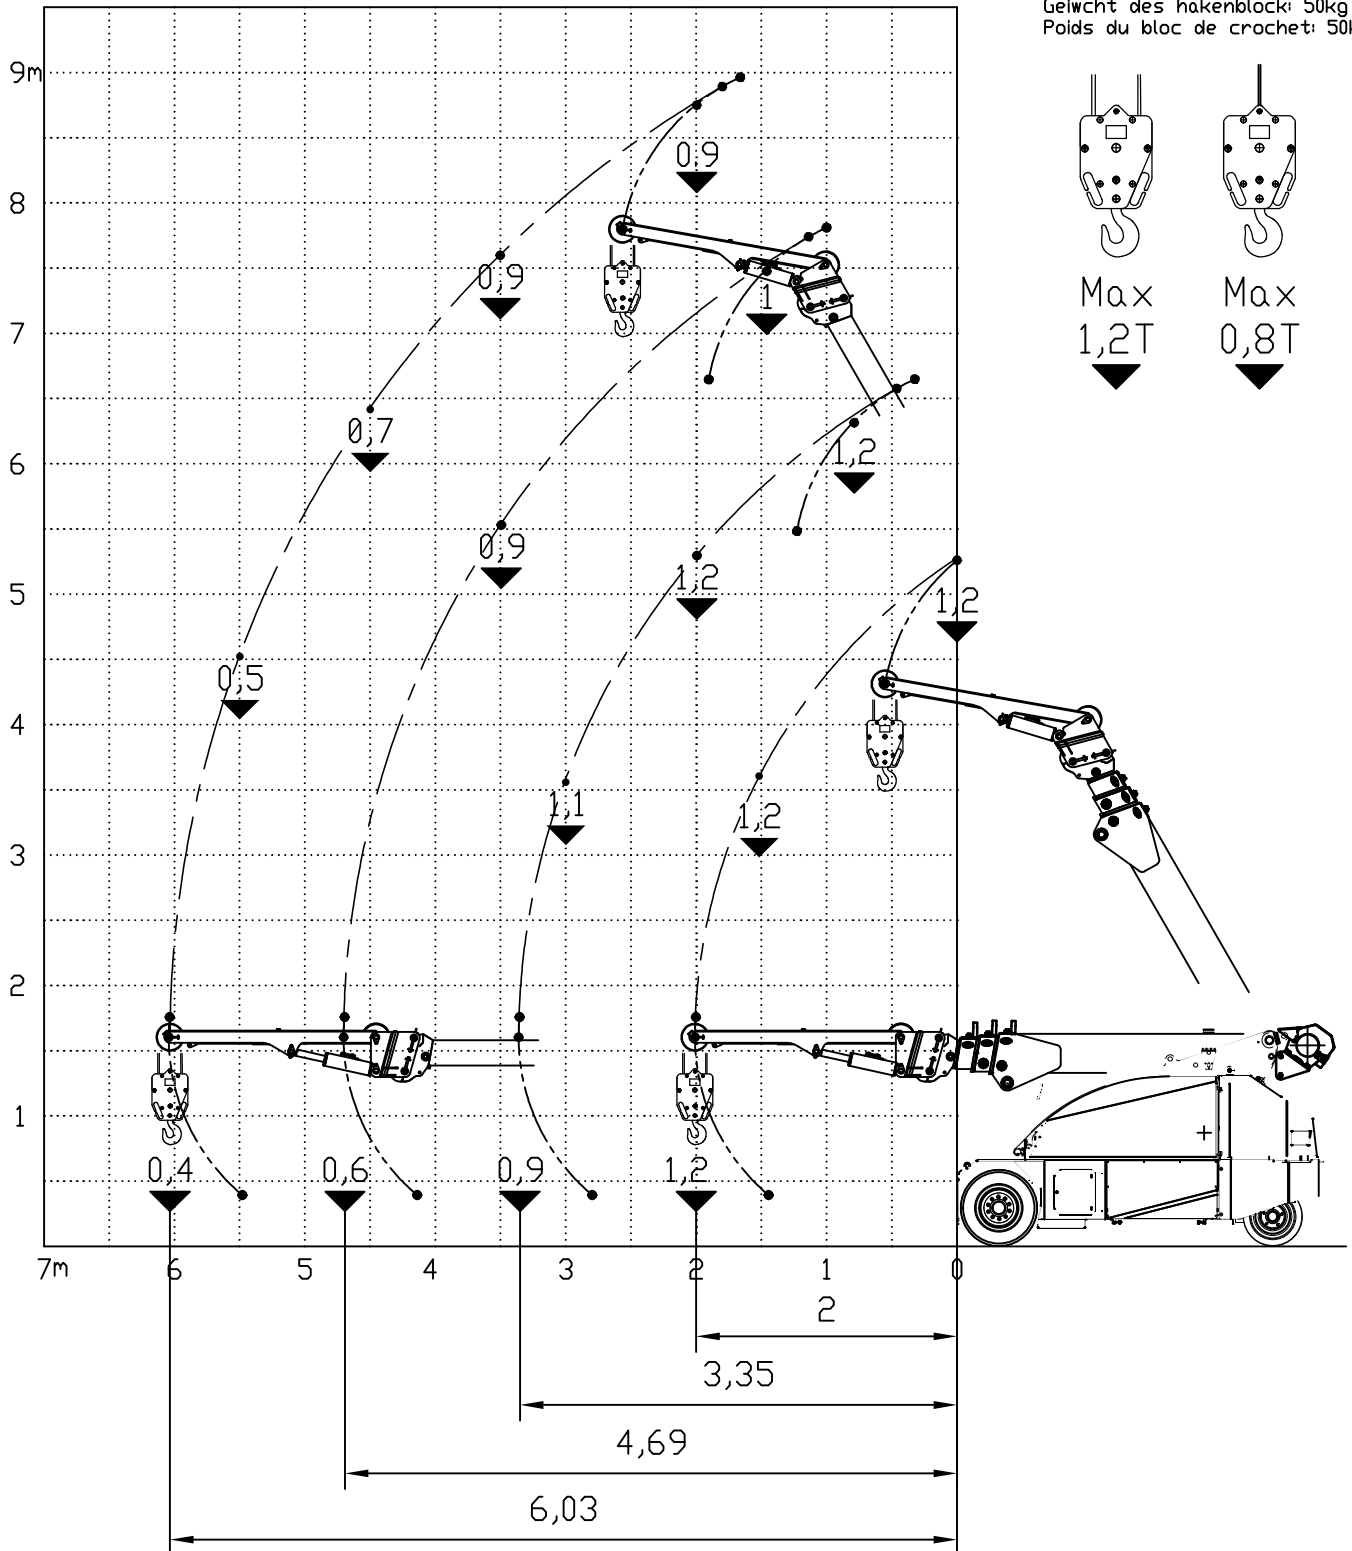

MC 45S

Z1+Z2

COD. 090-DIA-02261 00 H1:60