MC 45S

RADIO-REMOTE CONTROL ON DRIVING, STEERING, BOOM MOVEMENTS, WINCH AND OTHER ACCESSORIES

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

REMOVABLE COUNTERWEIGHTS

HYDRAULICALLY TELESCOPING SEQUENTIAL TYPE BOOM

Options :

- HYDRAULIC WINCH
- HYDRAULIC FLY JIB
- BENDABLE MANUAL JIB WITH MANUAL EXTENSION
- NON-MARKING TIRES
- HYDRAULIC FORKS
- MAN BUCKET
- ATEX CONVERSIONS
- CUSTOMIZED PAINTING

Technical features

Max Capacity kg	4,500
Dimensions mm	2775x1200x1648

	Front-wheels drive. 2 electric motors AC 3 kW 48V Insulation class H
	Total Kg. 4,900 Removable counterweights Kg. 1,360
	48 V - 600 Ah 8 working hours
	Front nr. 2 superelastic 23x10-12” Rear nr. 2 superelastic 18x7-8”
	Rear Steering angle -90°/+90°
L.M.I.	Electronic safe load indicator and tilting moment limiter
	Automatic braking system on all wheels
	Fabricated from preformed and welded quality steel plate
	+60°/-15°
	Motor driven pump 9 kW - 48 V AC, Insulation class H

Load charts

HOOK

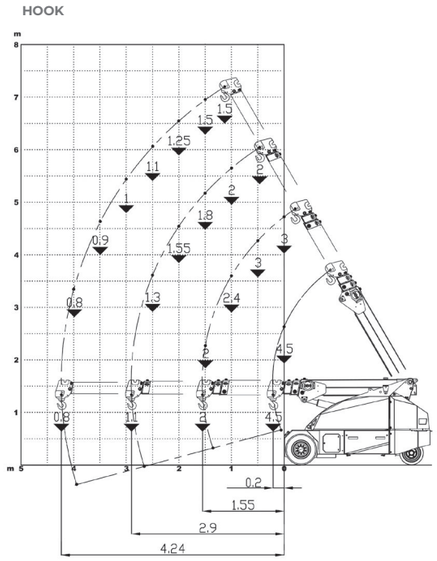

HYDRAULIC WINCH

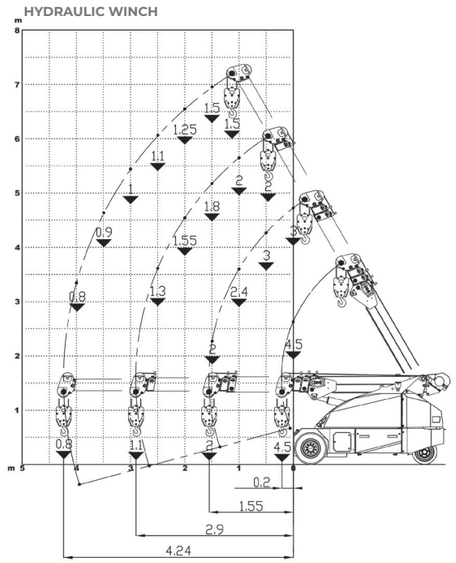

EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE- 2014/35 UE- 2000/14 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications

Dimensions

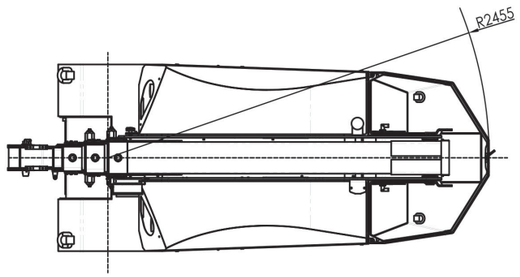

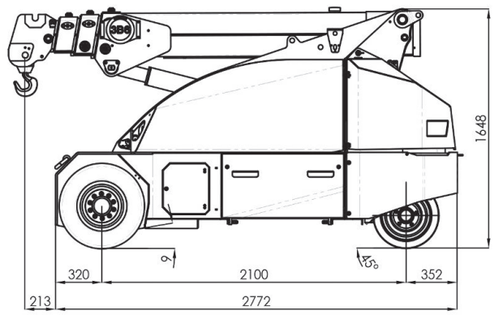



DIAGRAMMA DELLE PORTATE (t)
CAPACITY DIAGRAM (t)
TRAGLASTDIAGRAMM (t)
LASTENDIAGRAM (t)
TABLEAU DES CHARGES (t)
DIAGRAMA DE LAS CARGAS (t)

JMG
MILANO - ITALY

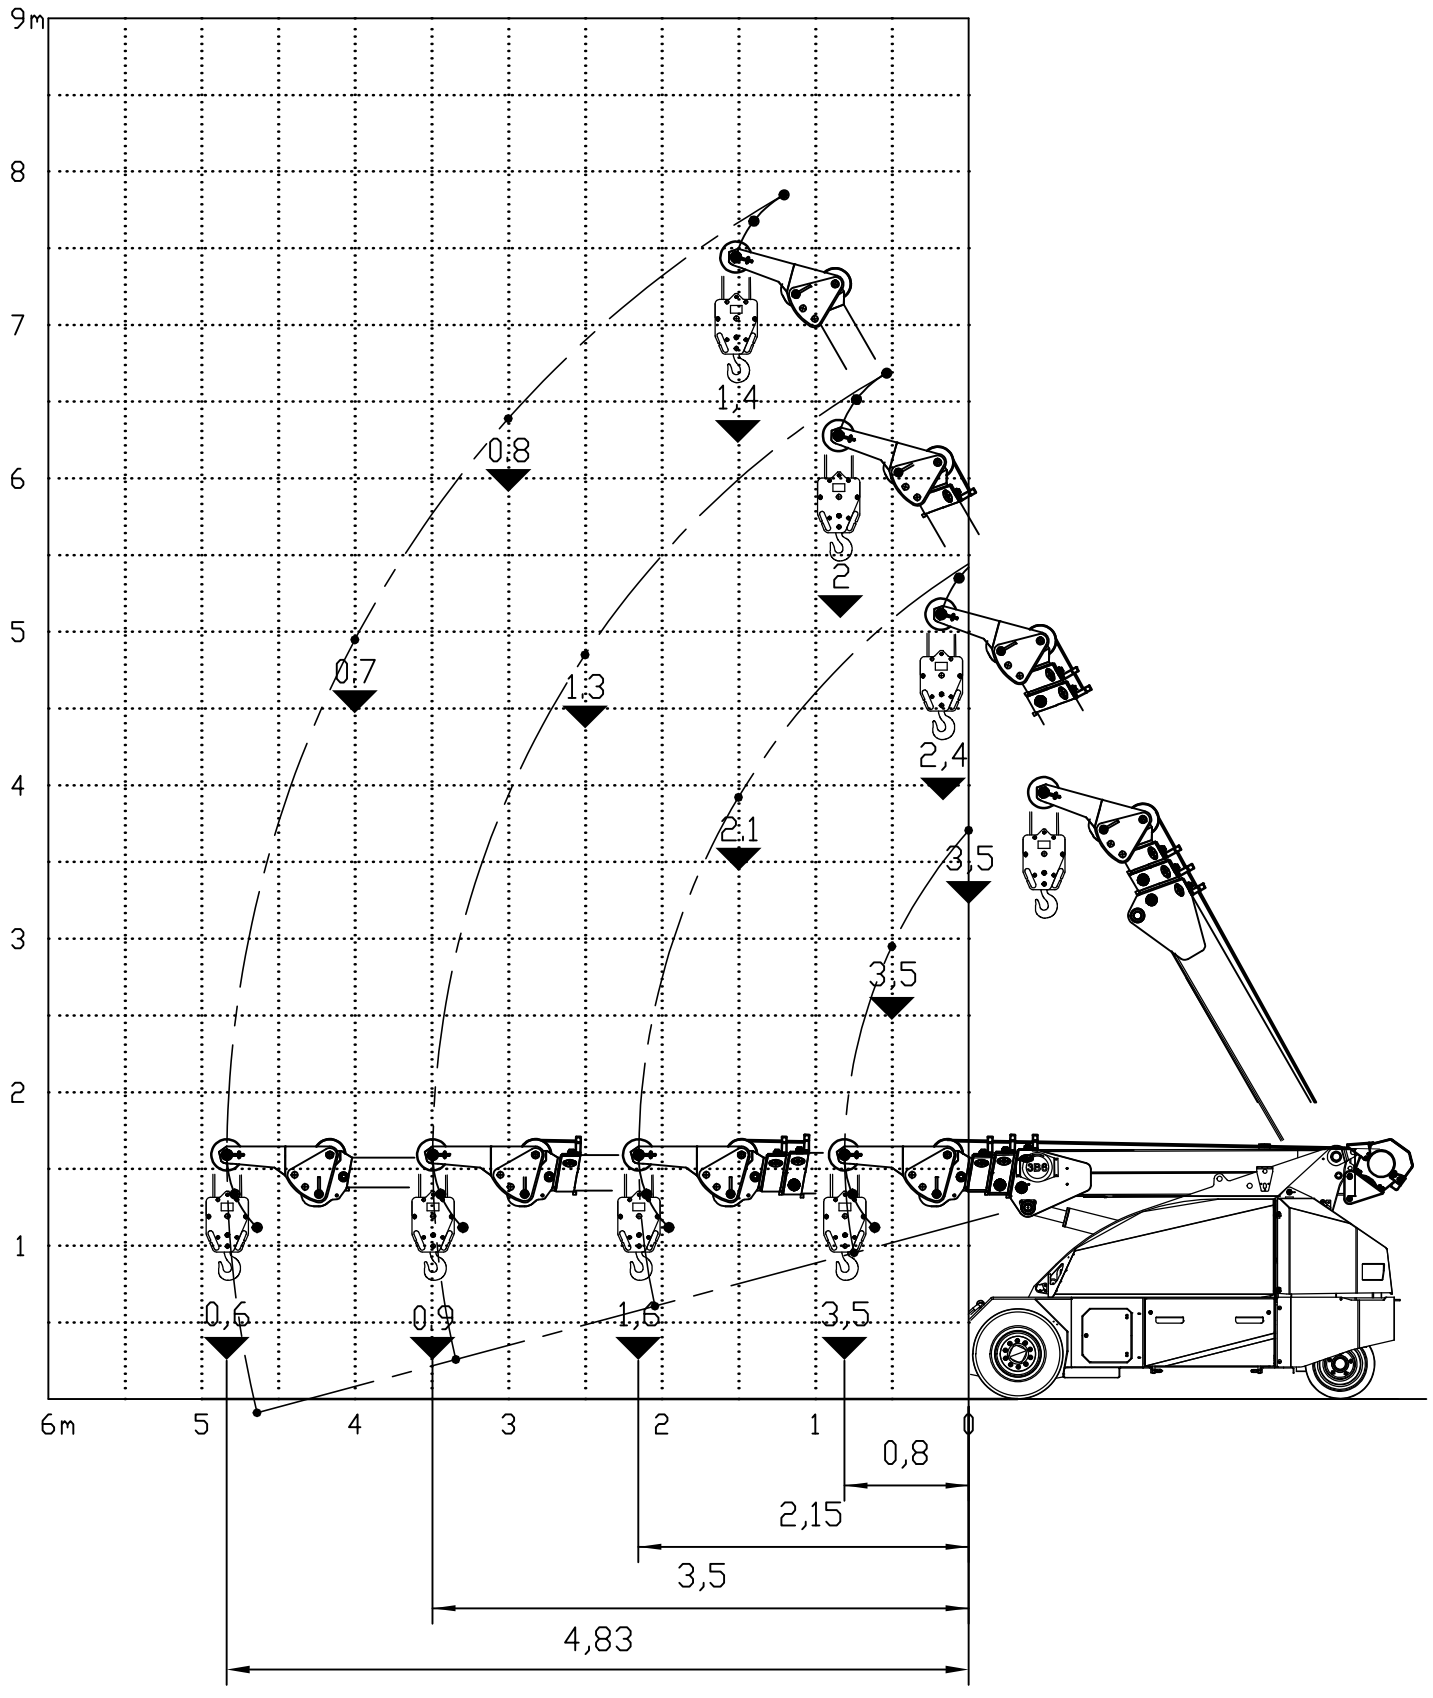

MC45S Z1+Z2

COD. 090-DIA-01221 00 H 1:50

DIAGRAMMA DELLE PORTATE (t)
CAPACITY DIAGRAM (t)
TRAGLASTDIAGRAMM (t)
LASTENDIAGRAM (t)
TABLEAU DES CHARGES (t)
DIAGRAMA DE LAS CARGAS (t)

JMG
MILANO - ITALY

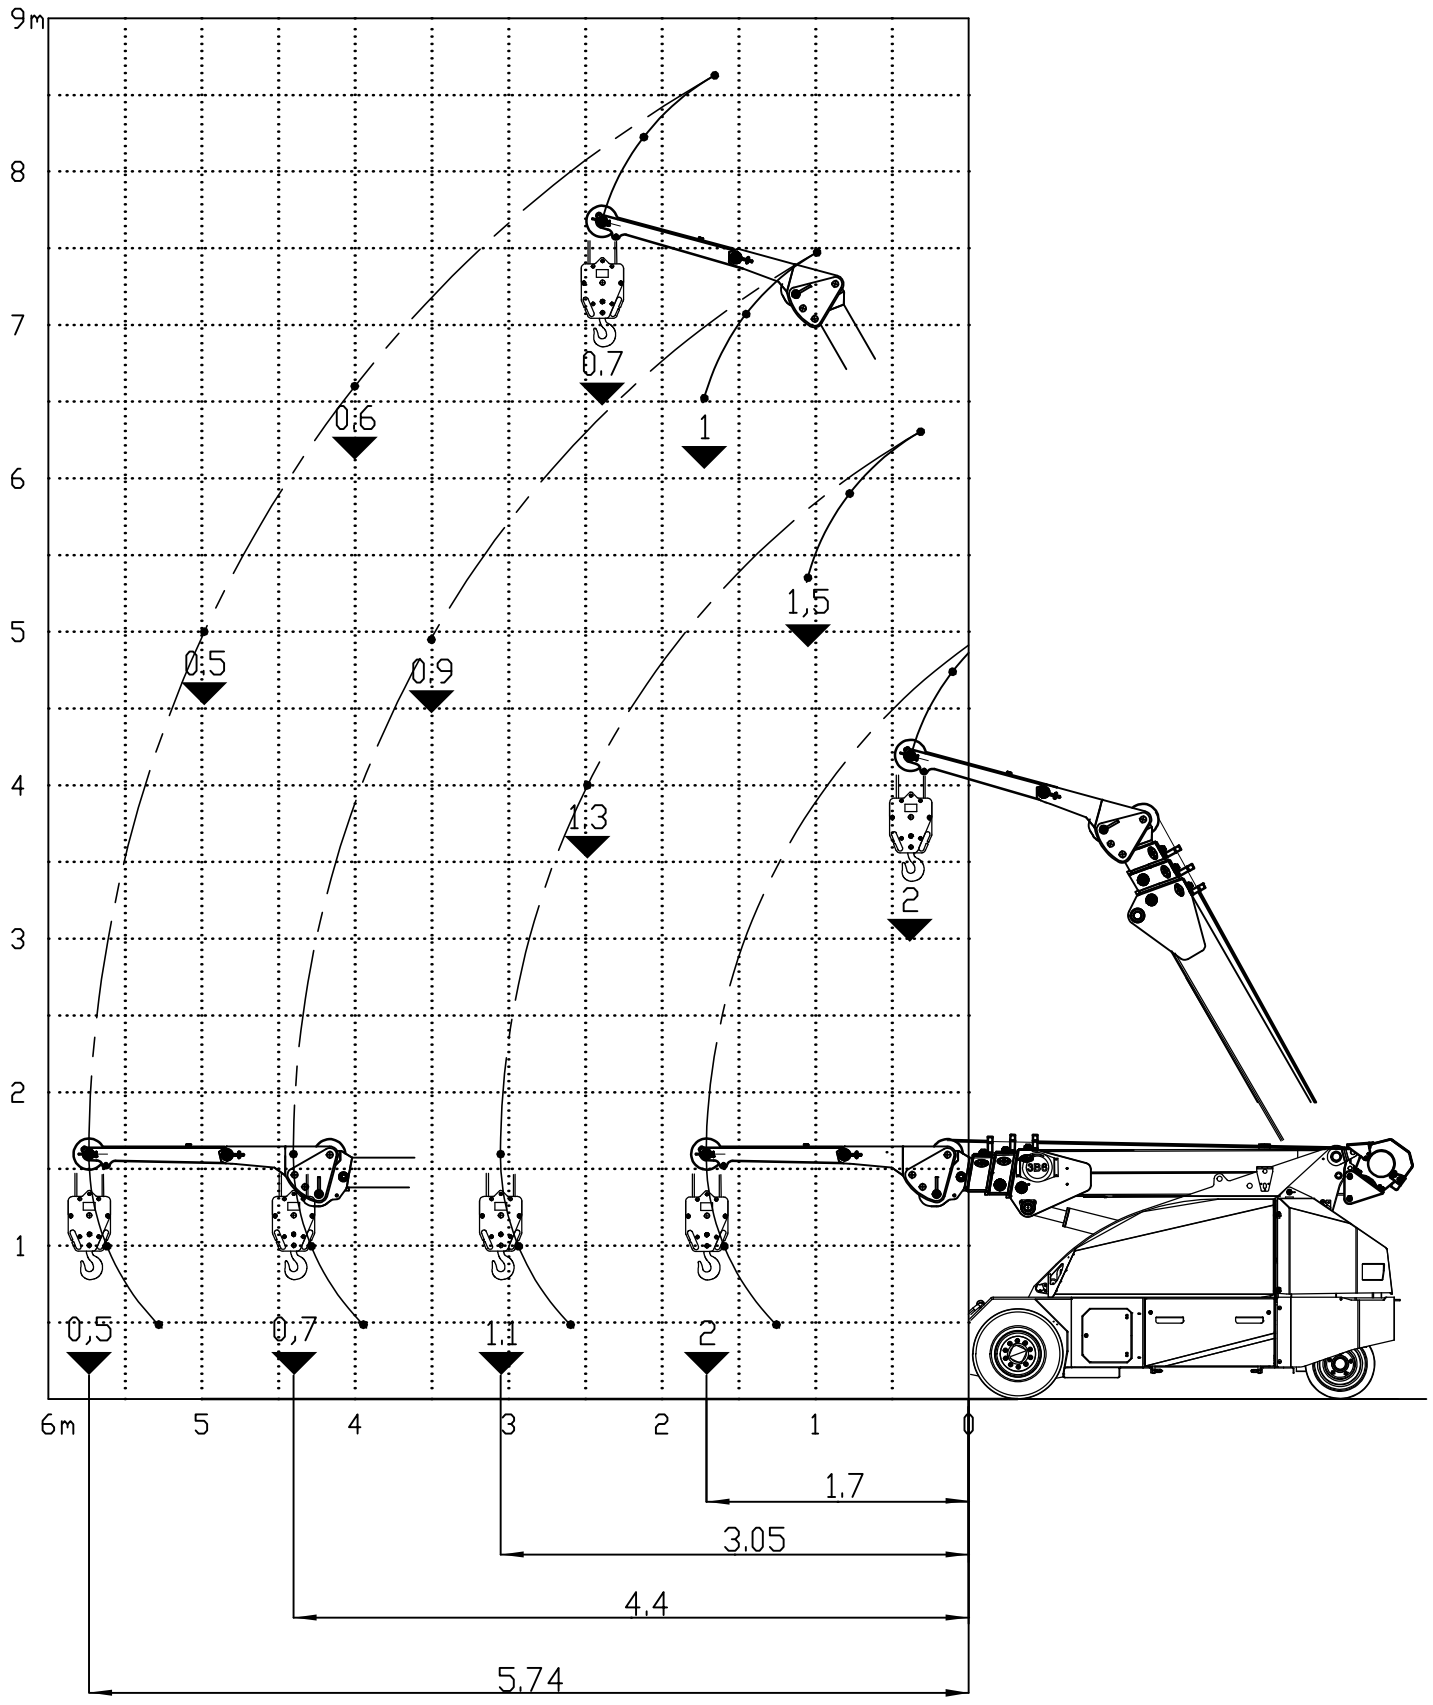

MC45S Z1+Z2

COD. 090-DIA-01233 00 H 1:50

DIAGRAMMA DELLE PORTATE (t)
CAPACITY DIAGRAM (t)
TRAGLASTDIAGRAMM (t)
LASTENDIAGRAM (t)
TABLEAU DES CHARGES (t)
DIAGRAMA DE LAS CARGAS (t)

Peso del bozzello: 50kg
Weight of the block: 50kg
Gewicht des hakenblock: 50kg
Poids du bloc de crochet: 50kg

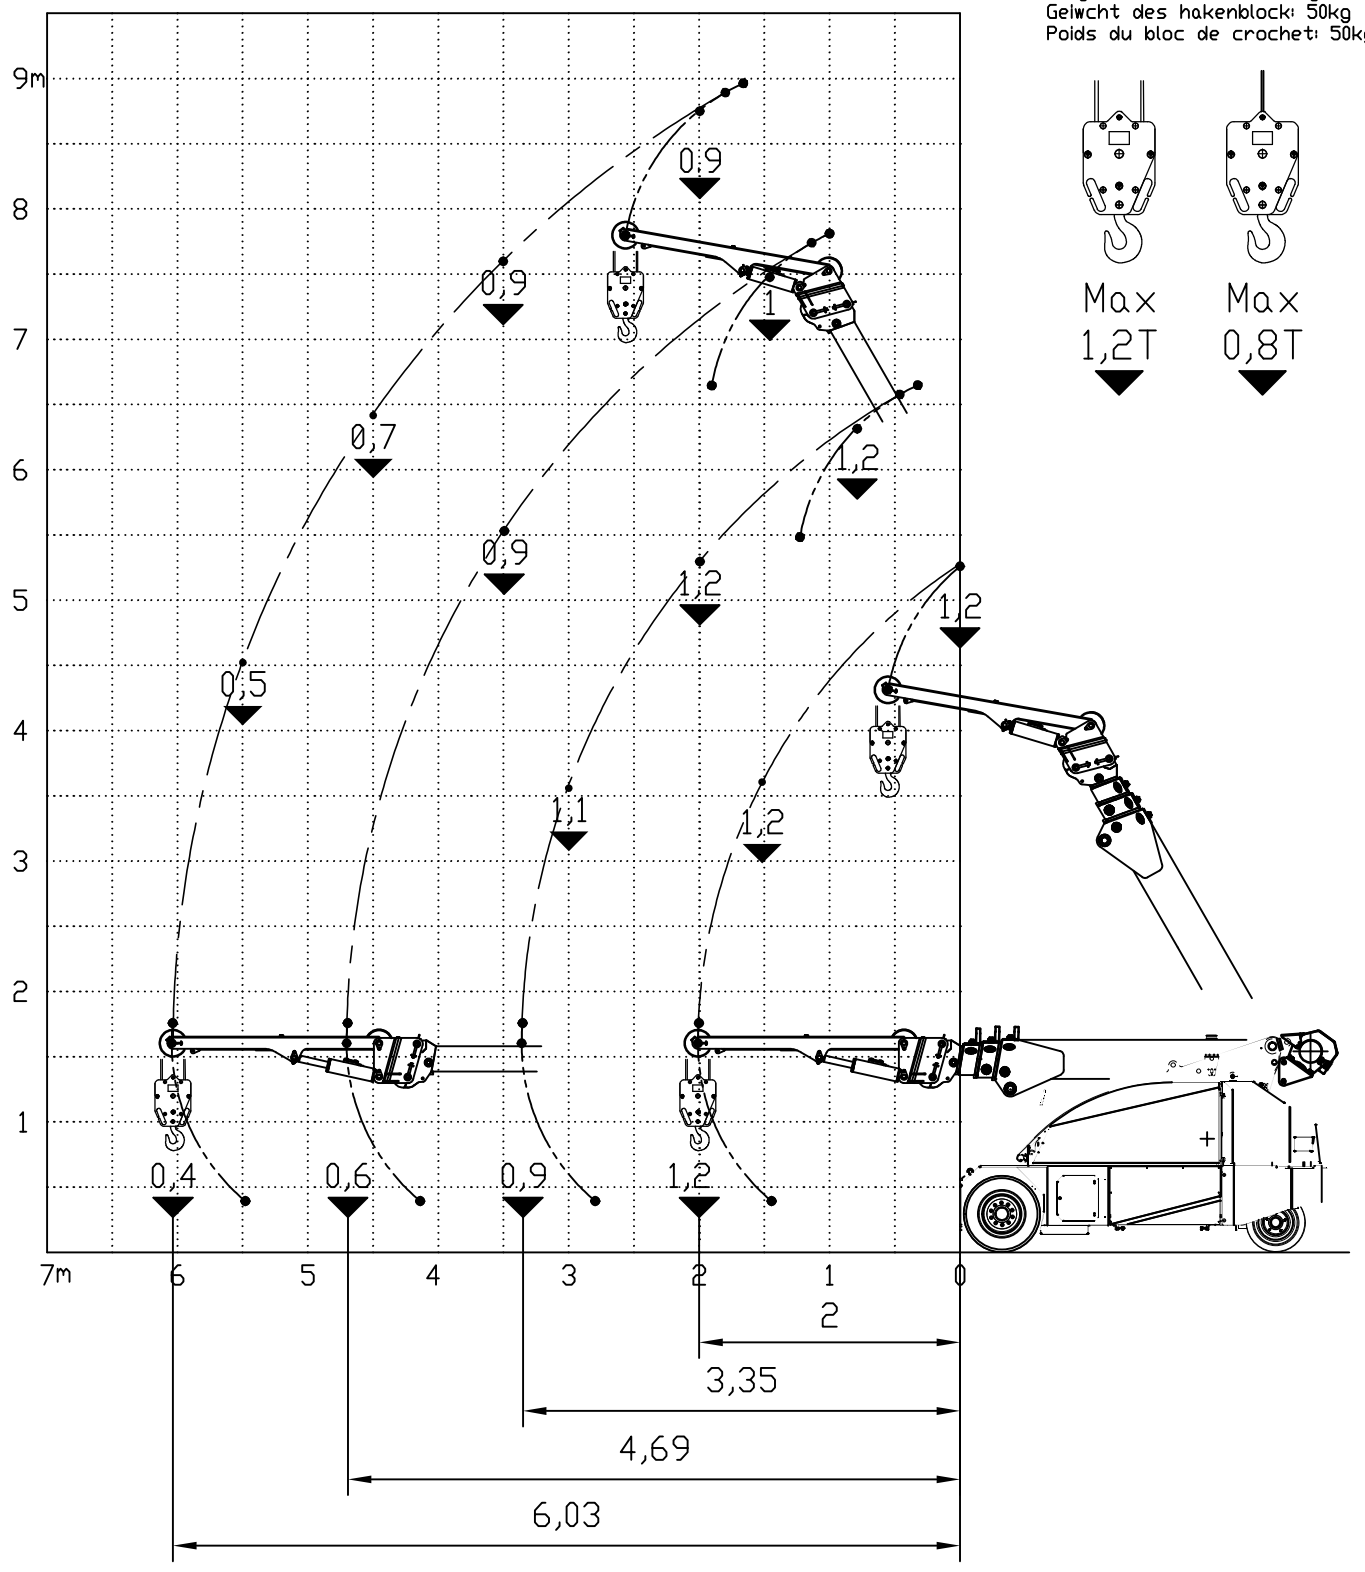

MC 45S Z1+Z2

COD. 090-DIA-02261 00 A 1:60